

## ZXP Series 8<sup>™</sup> Retransfer Card Printer



SEE MORE. DO MORE.



#### Innovative, Best-in-Class Retransfer Card Printer

With best-in-class, productivityboosting, full-throttle throughput, produce vivid color plastic cards on demand fast—thanks to Zebra's highly advanced ZXP Series 8 retransfer card printer and its patent-pending image transfer process. Yet even at unparalleled print speeds, the printer achieves superior, photo-like image quality that boasts rich, consistent colors and strikingly sharp resolution.

The ZXP Series 8 includes ZMotif<sup>™</sup> XML-based software for easy integration with enterprise applications. A modular design gives you the flexibility to add a variety of encoding options as needed. And the printer's high reliability minimizes maintenance needs and total cost of ownership.

### **Ideal for These Applications**

ID and access control cards

Government-issued driver's licenses

National ID and voter registration cards

Instant issuance of financial cards

Personalized gift, membership and loyalty cards

Smart cards in travel, gaming and entertainment



### Genuine Zebra™ Supplies

Genuine Zebra supplies meet stringent quality standards and are recommended for optimal printing quality and proper printer performance. The ZXP Series 8 printer is designed to work only with Zebra True Colours<sup>®</sup> i Series<sup>™</sup> ribbons, Zebra True Colours<sup>™</sup> i Series transfer film and Zebra True Secure<sup>™</sup> i Series laminates.

For more information visit, www.zebra.com/zxpseries8

# ZXP SERIES 8

#### **Superior Performance**

- Best-in-class throughput for printing, encoding and laminating—due in part to the patent-pending simultaneous 2-sided retransfer process plus efficient landscape print mode—increases your operational efficiency without sacrificing quality.
- Based on Zebra's image-processing technology, photo-quality color and resolution are obtained to meet your quality and brand specifications.
- Designed inside and out to be reliable and durable—reducing repair costs and downtime.

#### **Easy Printer Integration and Management**

- ZMotif XML-based drivers and SDK makes the printer enterprise-ready with driver and management utility tools for easy setup and faster deployment—saving IT time and costs.
- Microsoft<sup>®</sup> Windows<sup>®</sup> certified drivers ensure application compatibility, ease of use, and investment protection in existing software infrastructures.
- USB and Ethernet connectivity interfaces are standard, and WiFi optional for easy integration into local, networked, or wireless systems.

### Modular Design With Order-Now or Add-Later Options

- Magnetic stripe encoder
- Smart card contact and contactless encoders

#### Security Features

- Laminator module option for single- or dualsided lamination
- Transfer film easily shows tamper evidence for built-in fraud protection
- Lockable enclosure and card feeder option prevents unauthorized use
- Kensington<sup>®</sup> lock slot to secure printer to work environment

#### Genuine Zebra<sup>™</sup> Supplies

- Zebra True Colours i Series intelligent ribbon and transfer film automatically calibrate printer— increasing productivity, reducing downtime, and minimizing training.
- Zebra's True Secure i Series laminates create highly secure ID cards, and the patented linerless laminate is waste-free and lowers the cost per card.
- Choose Zebra for quality plastic cards in a variety of types and materials.
- For high-quality output, rely on Zebra ribbons, transfer film and laminate consumables.
- Use Zebra custom design services to create a unique laminate hologram for enhanced security.



#### Innovative Hardware Matched with Innovative Software

The Zebra ZXP Series 8 printer is based on leading-edge software technology that enables high-performance printing and meets demanding enterprise needs for application integration and management.

ZMotif, Zebra's XML standards-based printer and job control software platform, delivers the benefits of card printing transparently via Windows<sup>®</sup> certified drivers, along with an advanced Software Development Kit (SDK) and development tools for application integration and printer management.

The ZXP toolbox application provides a complete management console for advanced printer and driver configuration and management. Features such as user role-based driver password protection, configuration save and restore capability, print logging, and a library suite of test cards, ensure that setup and management of ZXP Series 8 printers are a snap—whether by a single user or via advanced multiple printer configurations management.

## ABOUT RETRANSFER PRINTING TECHNOLOGY

Unlike traditional direct-to-card printers, which use a printhead that prints through a ribbon directly onto the card, retransfer printers print onto a flexible, transparent film that is then thermally bonded to the card.


### In General, Benefits of Retransfer Printing Include:

- Higher image quality and print resolution
- The ability to print on uneven card surfaces such as smart cards
- True edge-to-edge printing (via over-the-edge printing). Traditional card printers leave a white border at the edges of the card.
- The ability to print on non-PVC cards. Direct-to-card printers require a dye-receiving surface available only through PVC cards.
- More durable and abrasion-resistant cards
- Fraud protection, since the film is inherently tamper-evident

### Advantages of Zebra's Innovative Retransfer Card Printer

Zebra's ZXP Series 8 printer achieves the fastest print speed while maintaining top image quality, making it the best-in-class retransfer printer available on the market.

- Zebra achieves print speeds that far exceed any other retransfer printer, and that are comparable to many of the fastest direct-to-card printers on the market today.
- Zebra's image-processing technology compensates for image errors normally caused by high printing speeds—enabling photo-quality images and print resolution even at increased print speeds.

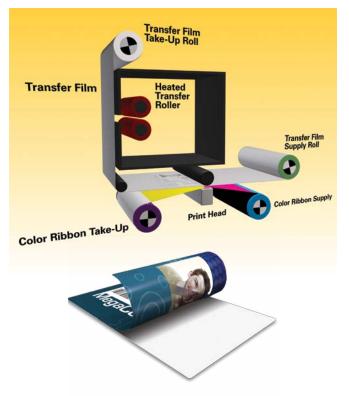

• Zebra's patent-pending simultaneous dual-sided image transfer process applies film to both sides of the card in a single pass, drastically reducing the print time.

The result is photo-like image quality and best-in-class throughput for mainstream printing, encoding and laminating—so you enjoy increased operational efficiency.

# SPECIFICATIONS AT A GLANCE\*

Microsoft Windows Certified Printer Drivers

Graphical card orientation setting to visualize

Supported: Windows XP, Windows Vista®,

card printing setup and configuration

element selection of black extraction

· Complete graphical control over area and

· Auto sensing of ribbon type, laminator and

· Printer configuration tools and utilities for

complete control over all printer functions

· Optional password protection settings and

user role-based security settings prevent

· Complete technology card management

· Printer test cards and diagnostics utilities

• Downloadable SDK for custom applications

Capabilities include direct access to PC/SC

· Support for complete Uv printer and inhibit

Zebra i Series intelligent technology uses RFID

tags to authenticate and automate color rib-

transfer film, 200 PVC cards, 2 cleaning rollers

• Media Starter Kit—1 YMCK ribbon, 1 roll of

· XML-based SDK enables third parties to quickly

add advanced print and encoding features to

Smart Card encoder driver and XML-based job

encoder features and functionality

ensure error-free printing and fast

troubleshooting capabilities

control print job specifications

bons, transfer film and laminate

(kit not sold separately)

**True Colours i Series Ribbon** 

YMCK 4 panel: 625 images/roll

• YMCKK 5 panel: 500 images/roll

YMCUvK 5 panel: 500 images/roll

· Cleaning supplies

Asia-Pacific Headquarters

apacchannelmarketing@zebra.com

Latin America: Argentina, Brazil, Colombia, Florida (LA Headquarters in USA), Mexico Africa/Middle East: Dubai, South Africa

2010 ZIH Corp. CardSense, i Series, True Secure and all product names and numbers are Zebra trademarks, and Zebra, the Zebra head graphic and True Colours are registered trademarks of ZIH Corp. All rights reserved. Kensington is a registered trademark of ACCO Brands Corporation. Microsoft, Windows, Windows Server, Windows Vista are either registered trademarks or trademarks of Microsoft Corporation. MIFARE is a registered trademark of PPG Industries. HID and iClass are registered trademarks of HID Global Corporation. All other trademarks are the property of their respective owners. For more information, please contact our authorized partner

+65 6858 0722

accidental or unauthorized driver or printer

enables setup and testing of all printer and

· Card source and card type selection

smart card encoding options

**Toolbox Utility Features:** 

configuration changes

Windows Server® 2003, Windows 7

32 bit and 64 bit compatible

**ZMotif Software** 

**Driver Features:** 

parameters

and features

XML-Based SDK:

the ZXP printer

panel support

Supplies

#### Printer Name

#### ZXP Series 8

#### Printing

- · Dye sublimation retransfer
- · Full color or monochrome retransfer printing
- · Single- and dual-sided printing
- Max print speed single-side 190 cph\*
- Max print speed dual-sided 180 cph\*
- · Photo quality image
- · Over-the-edge printing on standard CR80 media
- \* Print speed based on click to drop, average print coverage, with USB connectivity, card per hour (cph).

#### **Standard Features**

- USB and Ethernet connectivity
- · Single-card feed capability
- 150 card capacity feeder (30 mil)
- 15 card reject hopper (30 mil)
- 100 card output hopper (30 mil)
- i Series<sup>™</sup> intelligent media technology
- · Auto-calibration of media
- 21-character, 6 line LCD operator display
- · 304 dpi (12.0 dots/mm) print resolution
- · 64 MB memory standard
- · Lifetime warranty on printhead
- · 2-year limited warranty on printer
- Microsoft<sup>®</sup> Windows<sup>®</sup> certified drivers
- · Kensington physical lock capable

#### **Options and Accessories**

- Laminator—single-sided and dual-sided
- · Lockable enclosure/card feeder
- ZebraCare<sup>™</sup> warranty programs
- 802.11b/g wireless connectivity
- Card input hopper (150 cards 30 mil)

#### **Encoding Options & Specifications**

- Smart card contact station—ISO 7816
- Magnetic stripe encoder—ISO 7811 and JIS-II\*\* (high and low coercivity)
- Combined MIFARE<sup>®</sup> ISO 14443 (13.56 MHz) and ISO 7816 contact encoder
- EMV level 1 certified
- UHF Gen 2 RFID encoder\*\*
- FeliCa contactless encoder\*\*
- · Encoding over Ether Ethernet-to-USB Device

#### Laminator Specifications

- · Single-or dual-sided lamination option (with dual-sided printer only)

- · Laminate for the top and bottom sold separately

**Corporate Headquarters** 

1 800 423 0442

inguiry4@zebra.com

\*Specifications subject to change without notice



rnet-	—requires	ZBR-PS300
vice	Sorvor	

- \*\* Available in future release

- 180 cards per hour dual-sided printing and

#### dual-sided lamination

- GSA FIPS 201 approved (dual-sided lamination)
- · Uses Zebra True Secure i Series laminates only
- Custom-coded laminates available

#### • YMCKI 5 panel: 500 images/roll YMCKKI 6 panel: 415 images/roll • YMC 3 panel: 800 images/roll

Monochome black: 2500 images/roll

#### **True Colours i Series Transfer Film**

• Clear and holographic: 1250 single-sided/650 dual-sided cards/roll

Other Locations / USA: California, Georgia, Illinois, Rhode Island, Texas, Wisconsin Europe: France, Germany, Italy, the Netherlands, Poland, Spain, Sweden, Turkey,

United Kingdom Asia Pacific: Australia, China, Hong Kong, India, Indonesia, Japan, Malaysia, Philippines, Singapore, South Korea, Taiwan, Thailand, Vietnam

**EMEA Headquarters** 

44 (0)1628 556000

mseurope@zebra.com

#### True Secure i Series Laminate

- Linerless & waste-free 1.0 mil top and bottom laminate: 625 images/roll
- · Laminate types: clear top, clear bottom, magnetic stripe, signature, smart card, and holographic wallpaper designs
- Custom laminates available with holographic images
- · Custom coded laminates available

#### **Card Specifications**

- Card thickness: 30 40 mil
- · Card size: ISO 7810 format, Type ID-1, CR-80 size
- · Card material: PVC and composite, ABS cards, PET, PET-G, and Teslin® composite\*
- Specialty cards: transparent (IR-blocked) or translucent card 30 mil (clear and colored)\*\*\*
- Technology cards: contact and contactless smart cards, UHF cards\*\*\*
- \*\*\* Please contact your Zebra reseller for qualification of cards

#### **Communications Interfaces**

- USB V2.0
- 10/100 Ethernet (encoding over Ethernet requires ZBR PS-300 Ethernet-to-USB Device Server)

#### Electrical

- Single-phase AC power
- 100V~240V AC and 50-60 HZ

#### Physical

#### Printer

- Height (w/card hoppers): 13.2"/334 mm
- Width (w/card hoppers): 18.75"/476 mm
- Width (w/card hoppers, w/laminator):
- 30.75"/781 mm • Depth: 20.4"/519 mm
- Weight (printer only): 27.5 lbs/12.5 kg · Weight (printer, laminator): 44 lbs/20 kg

#### Environmental

than 100 hours

is recommended.

- Operating Temperature: 59° F/15° C to 95° F/35° C
- Storage Temperature: 23° F/-5° C to 131° F/55° C
- · Operating Humidity: 20% to 80% inclusive, non-condensing
- Storage Humidity: 10% to 90% inclusive, non-condensing
- Shipping Temperature: -40° F/-40° C to 140° F/60° C
- · Shipping Humidity: 10% to 90% inclusive, non-condensing Media should not be above 140° F/60° C

for longer than 200 hours, and above 90%

relative humidity at 104° F/40° C for longer

NOTE: For optimum print quality and printer

performance, use of genuine Zebra™ supplies

-1 847 955 2283

inguiry4@zebra.com

Latin America Headquarters

P1010491 Rev. 7 (01/13)